

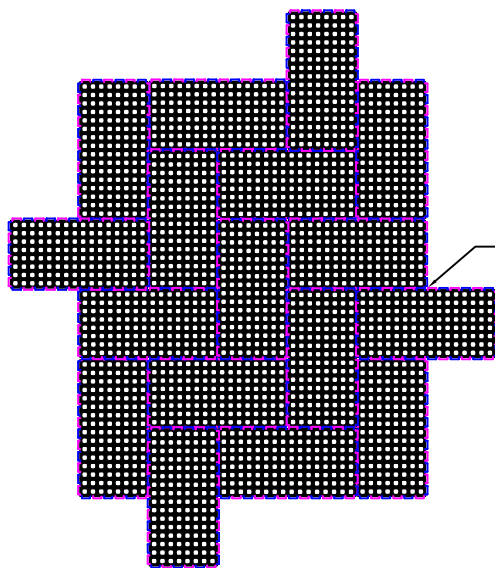


TYPICAL LAYOUT – BRICKLAYER PATTERN

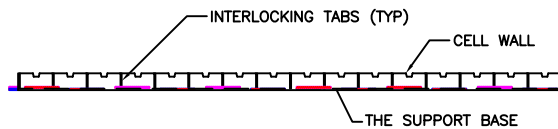


TYPICAL LAYOUT – HERRINGBONE PATTERN

GEOBLOCK MATERIAL SPECIFICATION	
MATERIAL	UP TO 100% RECYCLED POLYETHYLENE
COLOR	RANGES DARK SHADES GRAY TO BLACK
CHEMICAL RESISTANCE	SUPERIOR
CARBON BLACK FOR UV STABILIZATION, %	1.5 TO 2.0%
UNIT MIN CRUSH STRENGTH – EMPTY @ 70F (21C)	420 PSI (2,900 KPa)
UNIT MIN CRUSH STRENGTH – SAND FILLED @ 70F (21C)	5,980 PSI (41,285 KPa)
FLEXURAL MODULUS @ 73F (21C)	35,000 PSI (240,000 KPa)
NOMINAL DIMENSIONS – WIDTH X LENGTH	20 X 40 IN (0.5 X 1.0 M)
NOMINAL UNIT DEPTH	1.2 IN (30 MM)
NOMINAL AREA	5.3 SQFT (0.5 SQMTR)
CELLS PER UNIT	128
CELL SIZE	2.25 X 2.25 IN (57 X 57 MM)
TOP OPEN AREA PER UNIT	88%
BOTTOM OPEN AREA PER UNIT	56%
INTERLOCKING OFFSET SHEAR TRANSFER PINS	12 TABS PER 40 IN (PER 1 M)
NOMINAL WEIGHT PER UNIT	4.7 LBS (2.1 KG)
RUNOFF COEFFICIENT @ 2.5 IN/HR (64 MM) RAIN	0.15
UNITS PER PALLET	92

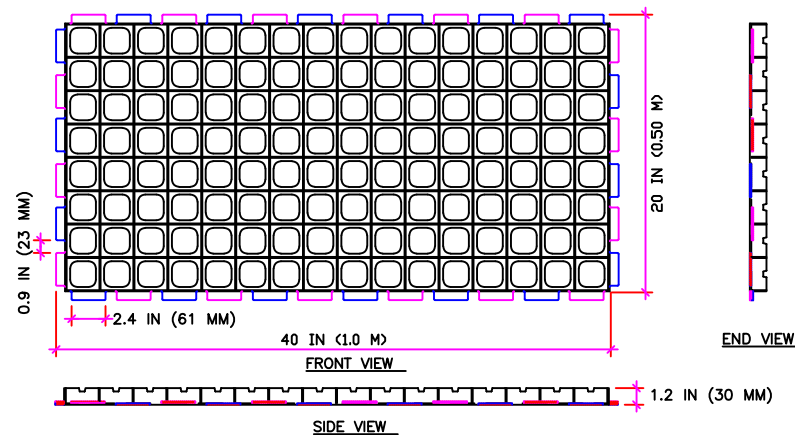

GEOBLOCK® COMPONENTS




GEOSYSTEMS

REYNOLDS PRESTO®
PRODUCTS, INC.
670 NORTH PERKINS STREET
APPLETON, WI 54914
920-738-1342
WWW.PRESTOGEO.COM

**GEOBLOCK
POROUS PAVEMENT SYSTEM**

PRESTO®, GEOSYSTEMS®, AND GEOBLOCK® ARE REGISTERED TRADEMARKS
OF REYNOLDS PRESTO PRODUCTS, INC.

DATE:	MARCH 2020	FILE NAME	GBBLOA1.dwg
SCALE:	NTS	SHEET	1

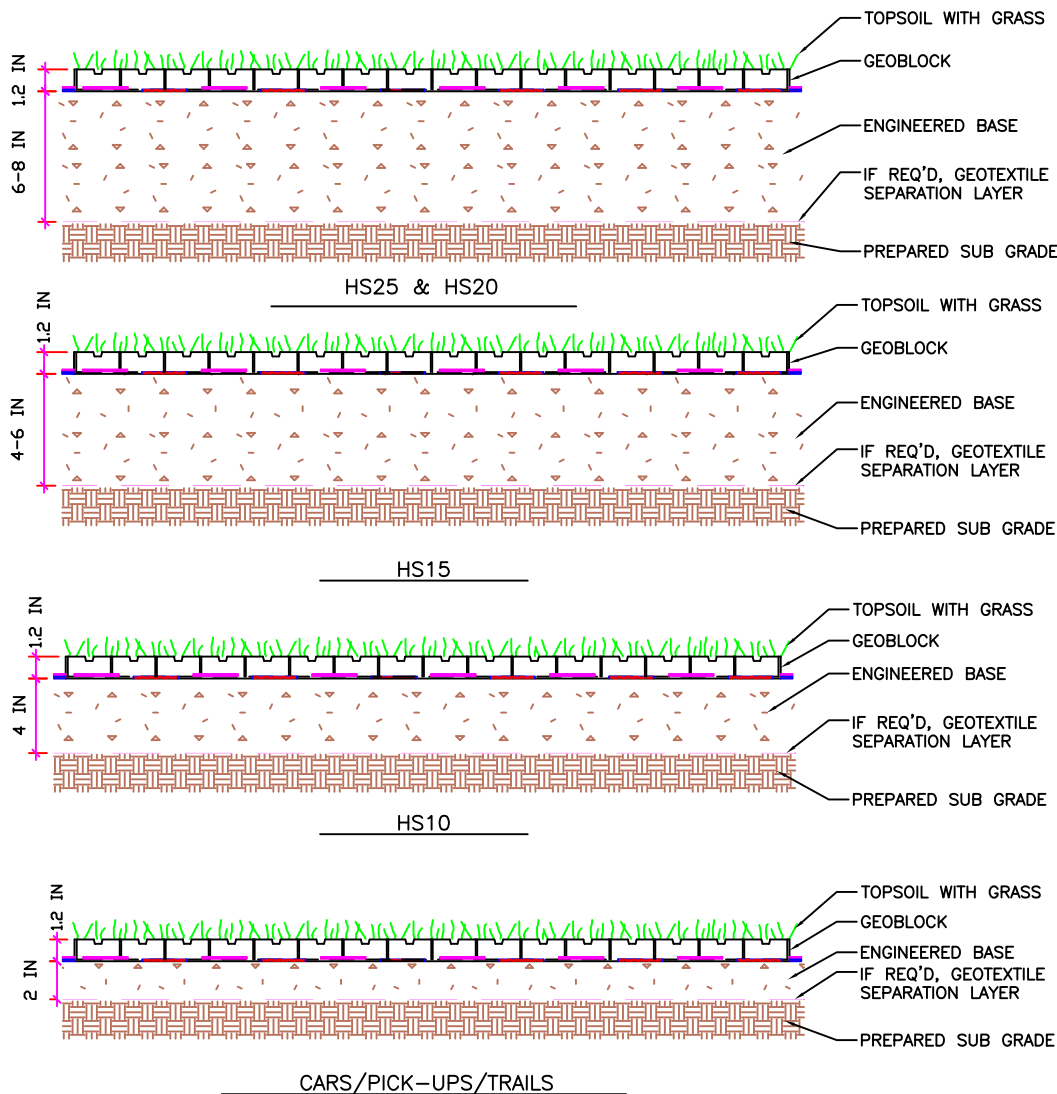

DESIGN GUIDELINES – BASE DEPTH

LOAD DESCRIPTION	CBR 2 - 4%	CBR > 4%
Heavy Fire Truck Access & H/HS25 loading. Typical 110 psi (758 kPa) tire pressure. Single axle loadings of 40 kips (178 kN). Gross vehicle weight of 90,000 lbs (40.1 MT).	8" Base	6" Base
Heavy Fire Truck Access & H/HS20 loading. Typical 110 psi (758 kPa) tire pressure. Single axle loadings of 32 kips (145 kN). Gross vehicle weight of 80,000 lbs (36.3 MT).	8" Base	6" Base
Light Fire Truck Access & H/HS15 loading. Typical 85 psi (586 kPa) tire pressure. Single axle loadings of 24 kips (110 kN). Gross vehicle loads of 60,000 lbs (27.2 MT).	6" Base	4" Base
Utility & Delivery Truck Access & H/HS10 loading. Typical 60 psi (414 kPa) tire pressure. Single axle loadings of 16 kips (75 kN). Gross vehicle loads of 40,000 lbs (18.1 MT).	4" Base	4" Base
Cars & Pick-up Truck Access. Typical 45 psi (310 kPa) tire pressure. Single axle loadings of 4 kips (18 kN). Gross vehicle loads of 8,000 lbs (3.6 MT).	2" Base	2" Base
Trail Use. Loading for pedestrian, wheelchair, equestrian, bicycle, motorcycle and ATV traffic.	2" Base	2" Base

- Notes:**
- This information is based on the use of Geoblock manufactured by Reynolds Presto Products, Inc. All rights reserved. Any use of this information for any rigid porous paver product other than that manufactured by Reynolds Presto Products, Inc. is strictly prohibited and makes this information invalid.
 - Engineered base is a homogenous mixture consisting of open graded crushed aggregate having an AASHTO # 5 or similar designation blended with pulverized topsoil and a void component generally containing air and/or water. This homogenous mixture will promote vegetative growth and provide required structural support. The aggregate portion shall have a particle range from 0.375 to 1.0 in (9.5 mm to 25 mm) with a D50 of 0.5 in (13 mm). The percentage void-space of the aggregate portion when compacted shall be at least 30%. The pulverized topsoil portion shall equal 33% +/- of the total volume and be added and blended to produce a homogenous mixture prior to placement.
 - If required, provide a non-woven geotextile separation layer and install in accordance with Manufacturer recommendations including overlaps based on sub grade CBR.
 - Connect Geoblock panels with the interlocking offset tab so that adjacent sections have horizontally level profiles.
 - Refer to the Geoblock Design and Construction Overview for a complete description of the design and construction methods.

REYNOLDS PRESTO®
PRODUCTS, INC.
670 NORTH PERKINS STREET
APPLETON, WI 54914
920-738-1342
WWW.PRESTOGEO.COM

**GEOBLOCK
POROUS PAVEMENT SYSTEM**

PRESTO®, GEOSYSTEMS®, AND GEOBLOCK® ARE REGISTERED TRADEMARKS OF REYNOLDS PRESTO PRODUCTS, INC.

DATE:	MARCH 2020	FILE NAME	GEOBLO1.dwg
SCALE:	NTS	SHEET	1